




■正面展開図

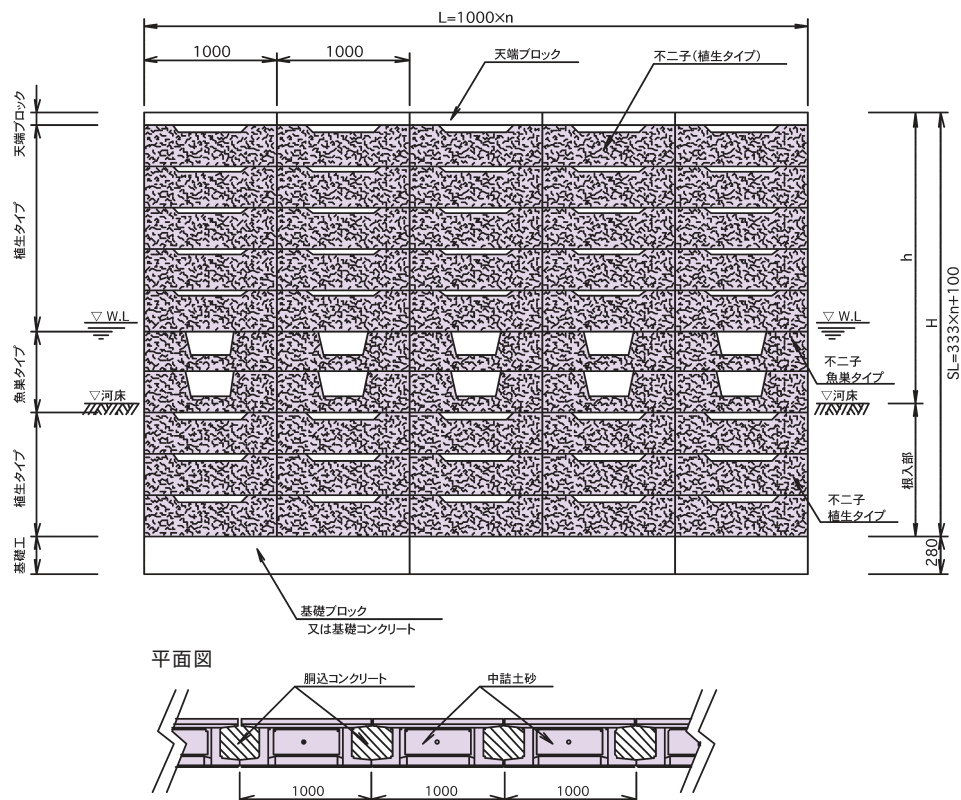



■標準断面図

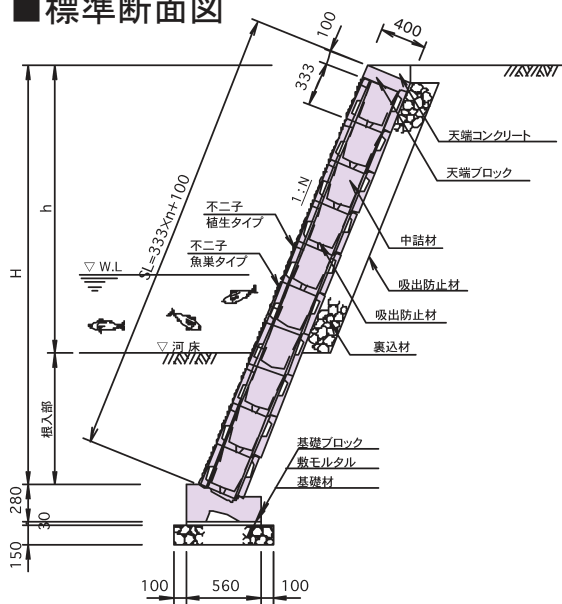

●粗面タイプ

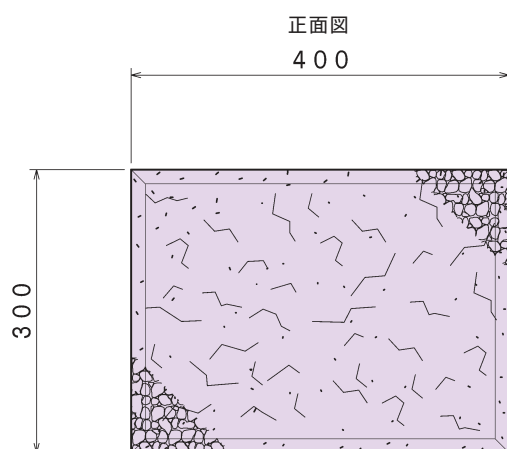



明度証明書 (明度 4.5)

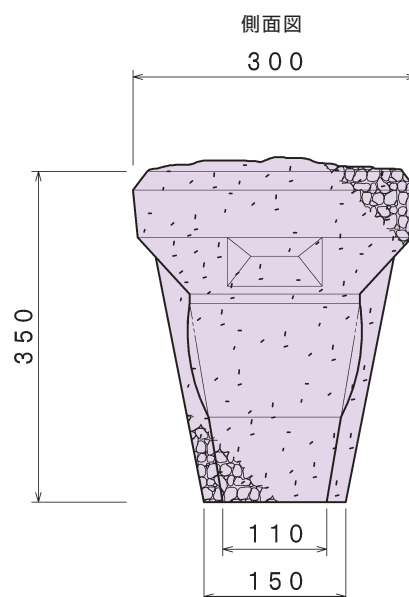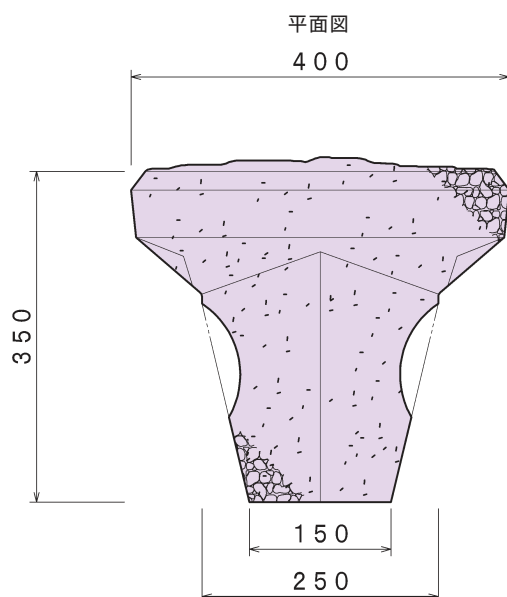


【 特 徴 】

- 空隙により保土性、保水性に優れ、苔類や植生が根着しやすくなっています。
- 水際には水質浄化作用や藻類の生育に優れています。
- 裏込コンクリート無しの場合はもちろん裏コン付でもパイプ等で水路（みずみち）を確保すれば擁壁前面と背面間で水、微生物等の交流があります。
- 表面のみポーラス製品も製作可能です。

●エコスリム側溝

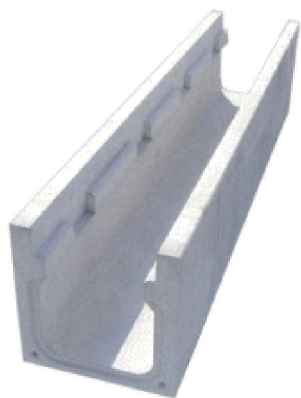

側面図


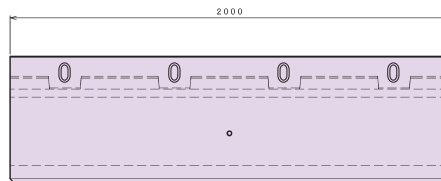


寸法表


呼び名	参考重量 (kg)	寸 法 (mm)										
		A	H	a	b	c	d	e1	e2	f	t	L
250×250	305	360	400	250	250	255	50	55	55	65	80	2000
300×300	378	420	455	300	300	305	55	60	60	70	80	2000
300×400	451	420	560	300	280	405	55	60	70	75	80	2000
300×500	532	420	665	300	270	505	55	60	75	80	80	2000
300×600	620	420	765	300	260	605	55	60	80	80	80	2000
400×400	527	530	575	400	400	405	60	65	65	80	90	2000
500×500	704	650	690	500	500	505	60	75	75	85	100	2000
500×600	800	650	790	500	480	605	60	75	85	85	100	2000
600×600	882	760	819	600	600	605	60	80	80	90	124	2000

クリーン側溝 T-25

●Aタイプ(管渠型側溝)



側面図

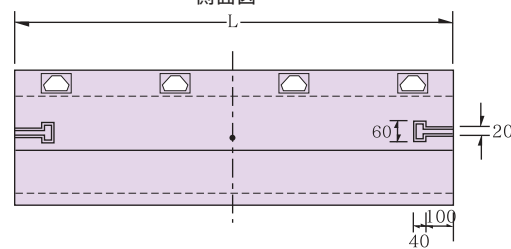


寸法表

名 称	参考重量 (Kg)	寸										法 (mm)					
		A	B	C	d	e	f	H1	H2	i	j	k	p	W	R1	R2	
300 A	375	300	220	300	50	90	75	430	408	55	180	178	30	400	200	80	
350 A	498	350	270	355	60	100	85	500	470	60	210	210	40	470	220	100	
400 A	596	400	320	400			90	550	520		230	240	60	520	250	140	
500 A	785	500	380	500	65	125	100	670	630	70	280	306		630	300	150	
600 A	1130	600	460	600	70	140	110	790	749	80	370	379		740	400	170	


※G 付きも対応可能です。

T-25

●KS側溝 I 型



側面図


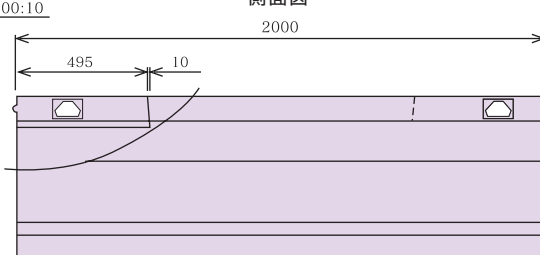


寸法表

呼 び 名		参考重量 (kg)	寸 法 (mm)																	
			B	H	a	c	c'	d	e	h	h'	s	i	k						
300	×	300	500	445	300	300	95	50	65	95	160	25	85	50						
	×	400		545		400						75			170	30				
	×	500		645		500											85	40		
	×	600		745		600													180	45
	×	700		845		700														
	×	800		945		800			90		180	170		40						
	×	900		1,045		900														
	×	1,000		1,145		1,000														
	×	1,100		1,245		1,100														
	×	1,200		1,345		1,200														
400	×	400	610	560	400	400	110	55	60	110	160	40	90	60						
	×	500		660		500						70			170	45				
	×	600		760		600											80	50		
	×	700		860		700													190	55
	×	800		960		800														
	×	900		1,060		900			90		180	170		45						
	×	1,000		1,160		1,000														
	×	1,100		1,260		1,100														
	×	1,200		1,360		1,200														


●他種製品についても御相談に応じます。担当営業にお申し付け下さい。

本体

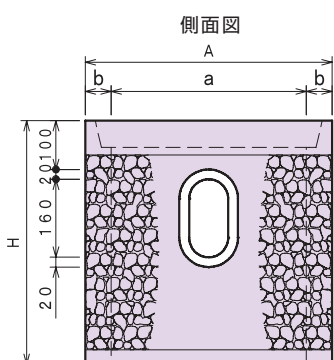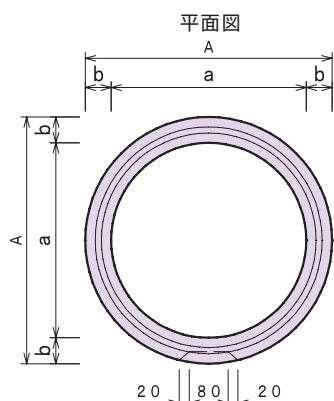


蓋


A タイプ

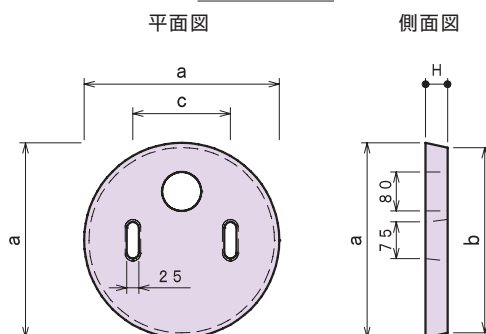

B タイプ

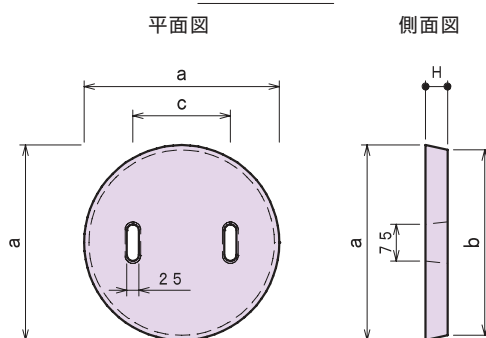


底版

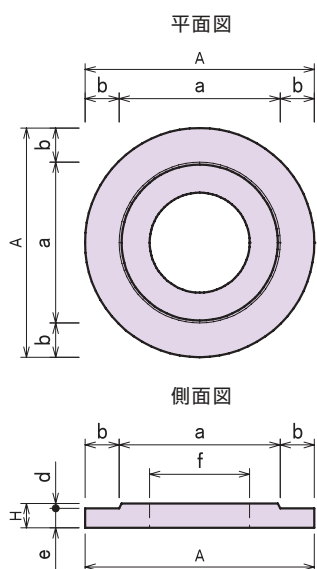

ゴミ受



参考重量：3kg

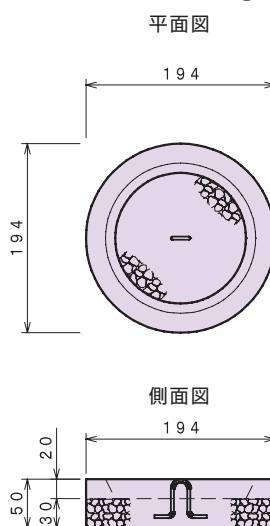


寸法表

呼び名	参考重量 (kg)	寸法 (mm)							
		A	H	a	b	c	d	e	f
本体	350	69	450	600	350	50	—	—	—
	400	69	506	500	400	53	—	—	—
蓋	350(A)	12	—	45	400	380	200	—	—
	350(B)	12	—	45	400	380	200	—	—
	400(A)	17	—	50	450	430	250	—	—
	400(B)	18	—	50	450	430	250	—	—
底版	350	15	470	50	330	70	—	10	40
	400	19	525	50	380	72.5	—	10	40


本 体

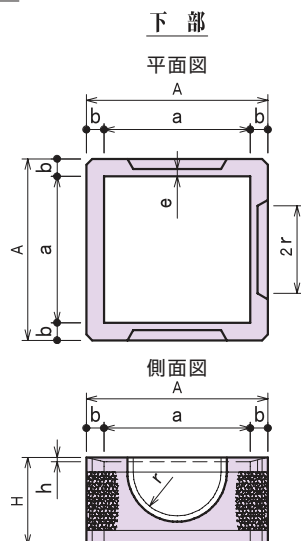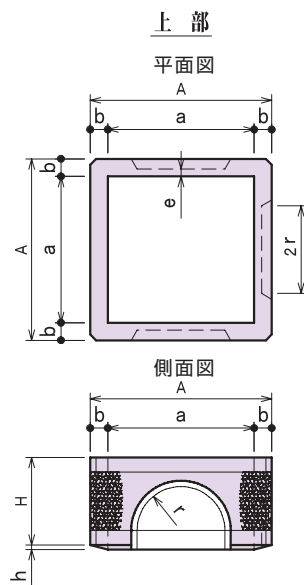


調 整

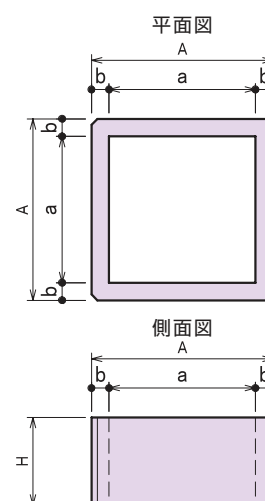


蓋 受

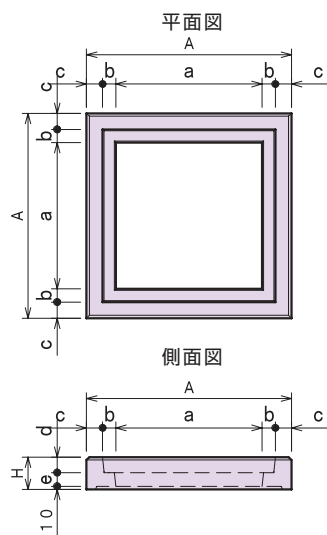

蓋

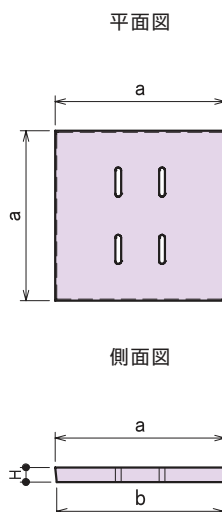


底 版

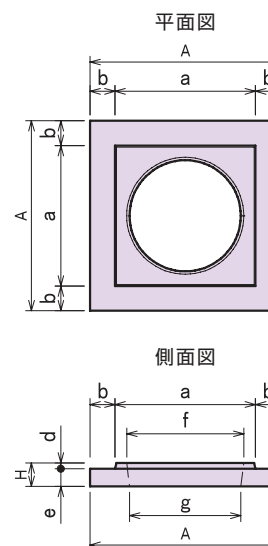

ゴ ミ 受

参考重量：7 kg
(2個1組)

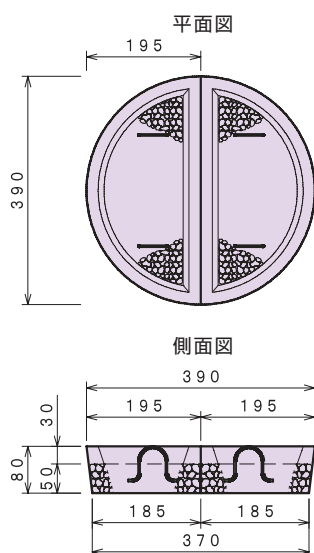


寸法表

呼び名	参考重量 (kg)	寸 法 (mm)										
		A	H	a	b	c	d	e	f	g	h	r
本 体	450	72	570	300	450	60	—	—	40	—	—	120
	500	77	620	300	500	60	—	—	40	—	15	150
	600	161	780	400	600	90	—	—	50	—	15	210
調 整	450	85 (43)	570	300 (150)	450	60	—	—	—	—	—	—
	500	94 (47)	620	300 (150)	500	60	—	—	—	—	—	—
	600	120 (60)	720	300 (150)	600	60	—	—	—	—	—	—
蓋 受	450	46	650	110	450	40	60	48	52	—	—	—
	500	47	700	110	500	45	55	53	47	—	—	—
	600	54	800	110	600	45	55	58	42	—	—	—
蓋	450	26	—	45	520	510	—	—	—	—	—	—
	500	37	—	50	580	570	—	—	—	—	—	—
	600	55	—	55	680	670	—	—	—	—	—	—
底 版	450	39	570	80	430	70	—	20	60	400	380	—
	500	49	650	80	480	85	—	20	60	400	380	—
	600	137	800	110	580	110	—	20	90	400	380	—

350 タイプ


本 体

参考重量：104kg

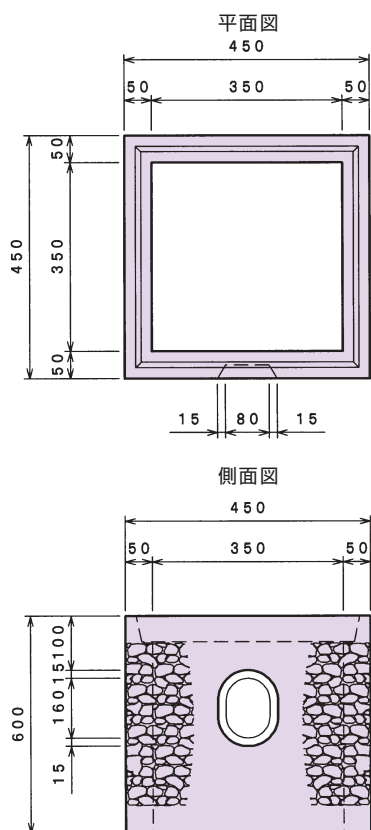


蓋

参考重量：16kg

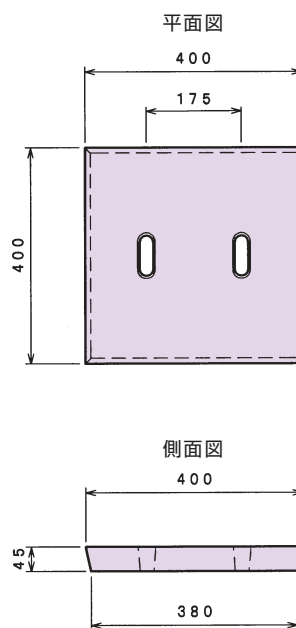


底 版

参考重量：20kg


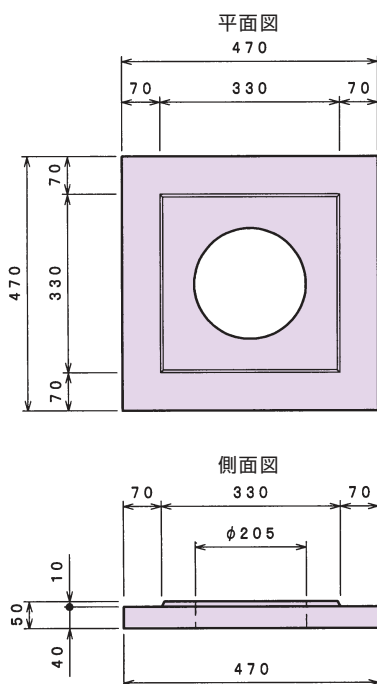


ゴミ 受

参考重量：3kg

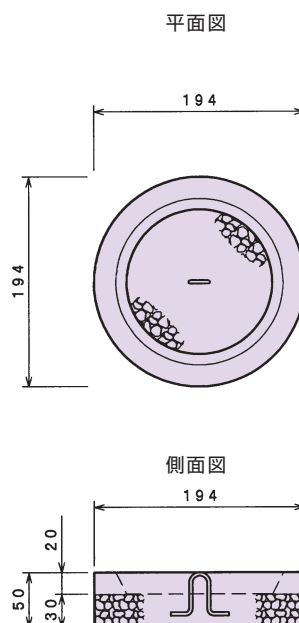

●U字溝

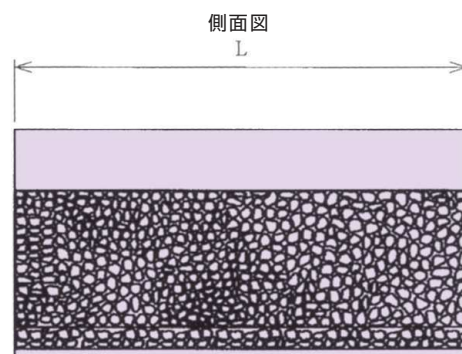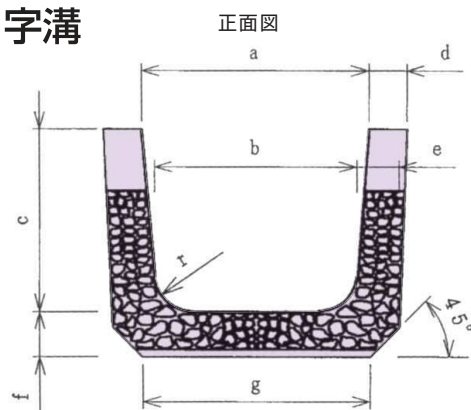



※浸透方向は相談に応じます

寸法表

単位(mm)

呼び名	a	b	c	d	e	f	g	r	L
150	150	140	150	30	35	35	160	30	600
180	180	170	180	35	40	40	190	50	600/1000
240	240	220	240	45	50	50	240	50	600/1000
300A	300	260	240	50	60	60	300	50	600
300B	300	260	300	50	60	60	300	50	600/1000
300C	300	260	360	50	60	60	300	50	600
360A	360	310	300	50	65	65	360	50	600
360B	360	310	360	50	65	65	360	50	600/1000
450	450	400	450	55	70	70	430	70	600/1000
600	600	540	600	70	80	80	600	70	600/1000

●道路側溝

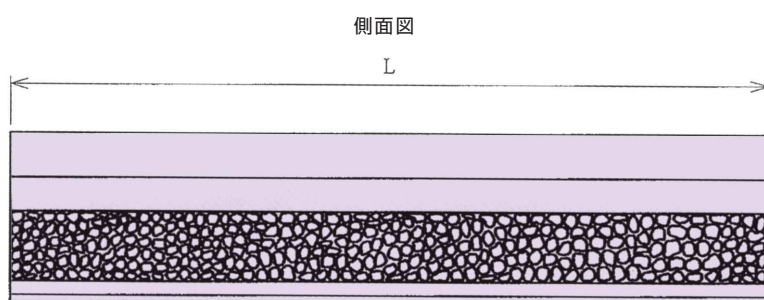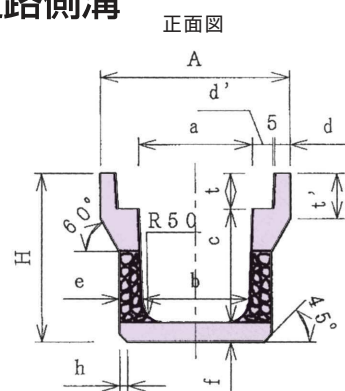


寸法表

単位(mm)

呼び名	A	H	a	b	c	d	d'	e	f	h	t	t'	L
250	460	395	250	230	250	45	55	65	55	30	90	120	1000/2000
300A	520	455	300	280	300	50	55	70	60	30	95	140	1000/2000
300B	520	560	300	270	400	50	55	70	65	40	95	140	1000/2000
300C	520	665	300	260	500	50	55	80	70	40	95	140	1000/2000
400A	630	580	400	370	400	55	55	70	70	40	110	140	1000/2000
400B	630	685	400	360	500	55	55	80	75	40	110	140	1000/2000
500A	750	705	500	460	500	60	60	80	80	40	125	155	1000/2000
500B	750	815	500	450	600	60	60	90	90	40	125	175	1000/2000

●KS側溝I型

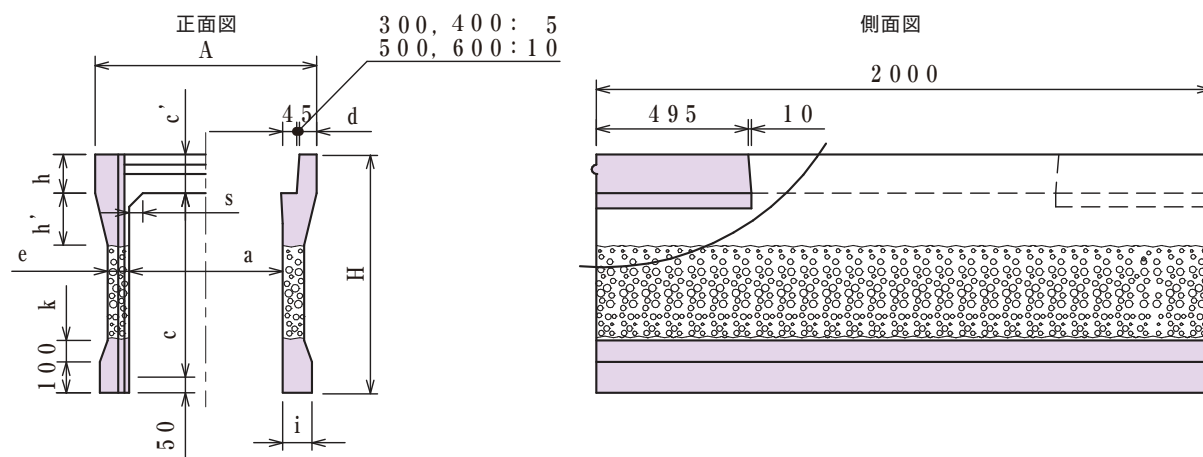

寸法表

呼び名	寸 法 (mm)														
	A	H	a	c	c'	d	e	h	h'	s	i	k			
300 × 300	500	445	300	300	95	50	65	95	160	25	85	50			
× 400		545		400									30		
× 500		645		500											
× 600		745		600											
× 700		845		700			75	170	40						
× 800		945		800											
× 900		1045		900											
× 1000		1145		1000			85	180	45	／					
× 1100		1245		1100											
× 1200		1345		1200											
400 × 400	610	560	400	400	110	55	60	110	160	40	90	60			
× 500		660		500									70	170	45
× 600		760		600											
× 700		860		700											
× 800		960		800			80	180	50	80					
× 900		1060		900											
× 1000		1160		1000											
× 1100		1260		1100			90	190	55	／					
× 1200		1360		1200											
500 × 500		720		675								500	500	125	55
× 600	775		600	85	180	55									
× 700	875		700												
× 800	975		800												
× 900	1075		900	95	190	65	／								
× 1000	1175		1000												
× 1100	1275		1100												
× 1200	1375		1200	100	200	75	／								
× 1300	1475		1300												
× 1400	1575		1400												
600 × 600	830	790	600	600	140	60	75	140	180	55	100	80			
× 700		890		700									90	190	65
× 800		990		800											
× 900		1090		900											
× 1000		1190		1000			100	200	75	／					
× 1100		1290		1100											
× 1200		1390		1200											
× 1300		1490		1300			100	200	75	／					
× 1400		1590		1400											
× 1500		1690		1500											



●浸透井戸

■浸透井戸φ600

参考重量：382kg

平面図


本体

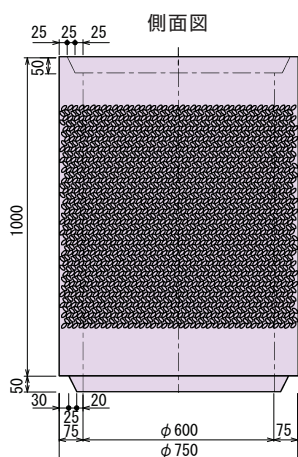


底塊Cリング

参考重量：60kg

平面図



側面図





参考重量：60kg

■浸透井戸


平面図

本体

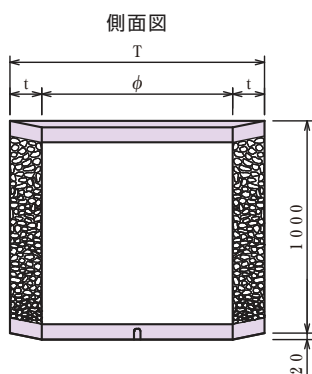


底塊Cリング

平面図



側面図



寸法表

単位(mm)

呼び名	重量(kg)	φ	T	t
900	947	900	1200	150
1200	1219	1200	1500	150
1500	1491	1500	1800	150

寸法表


単位(mm)

呼び名	重量(kg)	W	D	H	h
900	277	1250	650	150	30
1200	366	1550	950	150	30
1500	456	1850	1250	120	-

井戸枠


井戸枠 900 160kg

側面図

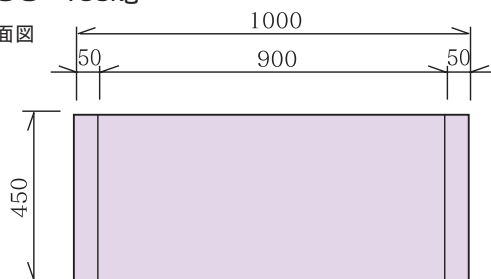


蓋 (900用) 80kg×2枚 (1組)

側面図



平面図

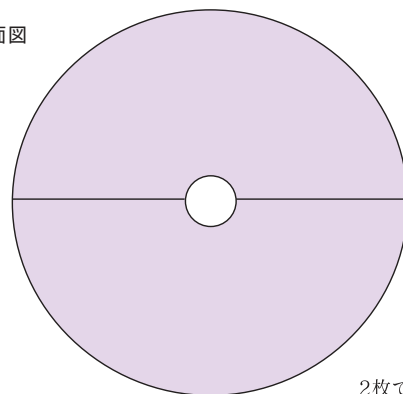

2枚で1組

井戸枠 1200 302kg

側面図

